



**R3596**



**5 AVIAN STREET, KUNDA PARK, QLD, 4556**

## LED ELLIPTUS

**VOLTAGE:**

12 volts AC

**CURRENT:**

0.34 Amps ( 4 Watts )

**RATING:**

Ingress protection - IP 56.

**MATERIALS:**

Pressure di-cast brass housing.

Stainless steel screws.

High temperature seals.

**GLASS:**

Heat resilient, flat tempered glass.

**LED LAMP:**

CREE MC-E HE7 series warm white,  
2,900K - 3,200K ( standard in the fitting  
R3596 )

**LENS:**

LEDIL FA10613 LM1-RS 10 degree  
( optional 15 degree )

**LUMINOUS FLUX:**

186 Lumens

**CRI:**

80

**CABLE:**

2 core round silicon, 0.75mm<sup>2</sup>.

Length - 500mm.

**TRANSFORMER:**


Refer to Transformer specification sheet for  
the 12 volt AC transformer that suits the  
number of fittings required.

**APPLICATION:**

This solid brass spotlight is functional in a  
variety of lighting design projects. The small  
size allows the light to be easily hidden in  
small scrubs or bushes. The truncated top  
provides visible, antiglare protection of the  
light source. Manufactured from solid brass,  
this fitting is highly resistant to corrosion. It  
also incorporates the latest energy saving  
LED technology which is a good alternative  
to traditional incandescent light sources.



### R3596 - LED ELLIPTUS

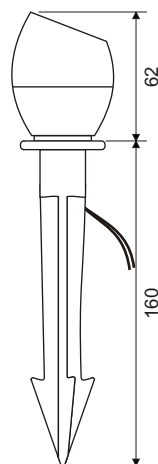

Sizes in millimetres



**E1990**

## SOLID STATE LED LANDSCAPE LIGHTING

**email [info@raydz.com.au](mailto:info@raydz.com.au)**

**5 AVIAN STREET, KUNDA PARK, QLD, 4556**

**Ph ( 07 ) 5456 4141 Fax ( 07 ) 5456 1601**